

## Clipped Sinewave 14 pin DIL Compatible

- 14 pin DIL package compatible
- Frequency range: 9.6MHz to 27.0MHz
- Supply voltage 2.8 to 5.0 Volts
- Customized specifications available

### DESCRIPTION

The M39S series TCXOs package is compatible with the industry-standard 14 pin Dual-in-Line package. With Clipped Sinewave output, tolerance is from  $\pm 1.0$ ppm over 0° to 50°C to  $\pm 1$ ppm over -30° to +70°C. Supply voltage 2.8 to 5.0 Volts.

### SPECIFICATION

Product Series Code	TCXO: M39S VCTCXO: VM39S
Frequency Range:	9.60MHz to 27.0MHz
Output Waveform:	Clipped Sinewave
Initial Calibration Tolerance:	$< \pm 1$ ppm at 25°C
Standard Frequencies:	10.0, 12.80, 13.0, 14.40, 15.36, 16.384, 19.2, 19.440, and 19.68MHz (Partial list)
Operating Temperature Range:	See table
Frequency Stability	
vs. Ageing:	$\pm 1.0$ ppm max. first year
vs. Voltage Change:	$\pm 0.3$ ppm max. $\pm 5\%$ change
vs. Load Change:	$\pm 0.3$ ppm max. $\pm 10\%$ change
vs. Reflow:	$\pm 1$ ppm max. for one reflow (Measured after 24 hours)
Supply Voltage:	+2.8, +3.0 or +5.0Volts (Specify when ordering)
Output Voltage Level:	0.8V p-p minimum
Start-up Time:	2ms typical, 5ms max.
Current Consumption:	See table below
Output Load:	10k $\Omega$ /10pF $\pm 10\%$
Harmonic Distortion:	-10dB typical, -7dB max.
SSB Phase Noise:	See table
Output Format:	DC block, AC coupled
Storage Temperature:	-50° to +100°C
RoHS Status:	RoHS Compliant version available. See part numbering procedure.

### FREQUENCY STABILITY

Frequency Stability (ppm)		$\pm 0.5$	$\pm 1.0$	$\pm 1.5$	$\pm 2.0$	$\pm 2.5$
Temperature Range (°C)	0 ~ +50	ASK	✓	✓	✓	✓
	-10 ~ +60	x	✓	✓	✓	✓
	-20 ~ +70	x	x	✓	✓	✓
	-30 ~ +75	x	x	x	✓	✓
	-40 ~ +85	x	x	x	x	✓


✓ = available, x = not available, ASK = call Technical Sales

### CURRENT CONSUMPTION

Supply Voltage		Max Current	
		+3.0V	+5.0V
Frequency Range	10.0 to 13MHz	1.3mA	2.0mA
	13.01 to 20MHz	1.5mA	2.2mA
	20.01 to 27MHz	2.0mA	2.5mA



### M39S - OUTLINES AND DIMENSIONS

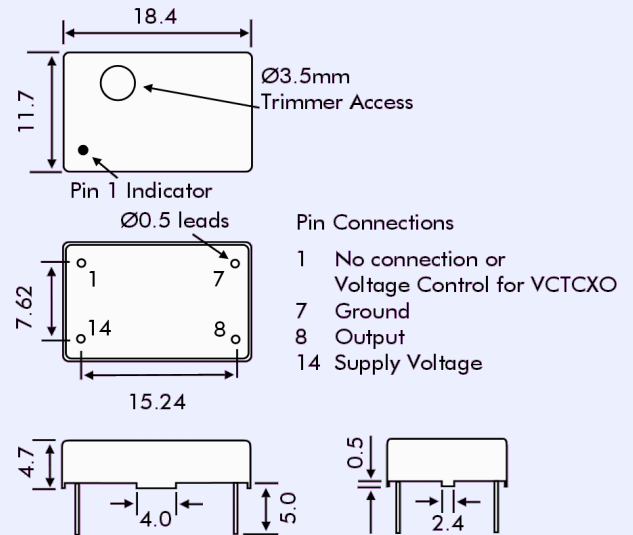

### VM39S VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Standard = +1.5 $\pm$ 1.0Volts for all input voltages. (Contact technical sales if +2.5 $\pm$ 2.0 Volts is required.)
Frequency Deviation:	$\pm 6.0$ ppm min.
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Input Impedance:	1.0M $\Omega$ min.
Modulation Bandwidth:	3.0kHz min. measured at -3dB
Linearity:	10% max.

### PHASE NOISE

SSB Phase Noise at 25°C	Offset (Hz)	10	100	1k	10k	100k
	M32S 13MHz (dBc/Hz)		-80	-115	-135	-148

### PART NUMBERING PROCEDURE

Example:

**M39 S 3 -19.44-2.5/-30+75**

Series Description

TCXO = M39

VCTCXO = VM39

RoHS Status

'G' = RoHS Compliant

Output type

'S' = Clipped sine wave

Supply Voltage

28 = 2.8 VDC

3 = 3.0 VDC

5 = 5.0 VDC

Frequency (MHz)

Stability over OTR ( $\pm$ ppm)

Operating Temperature Range (OTR) (°C)

Lower and upper limits.