


Clipped Sinewave 6 Pad SMD

- Industry-standard SMD package 11.4 x 9.6 x 3.0mm
- Close tolerance stabilities from $\pm 0.5\text{ppm}$ over 0° to $+50^\circ\text{C}$
- $\pm 1\text{ppm}$ over -40 to $+85^\circ\text{C}$
- Low power consumption



M63S - OUTLINES AND DIMENSIONS

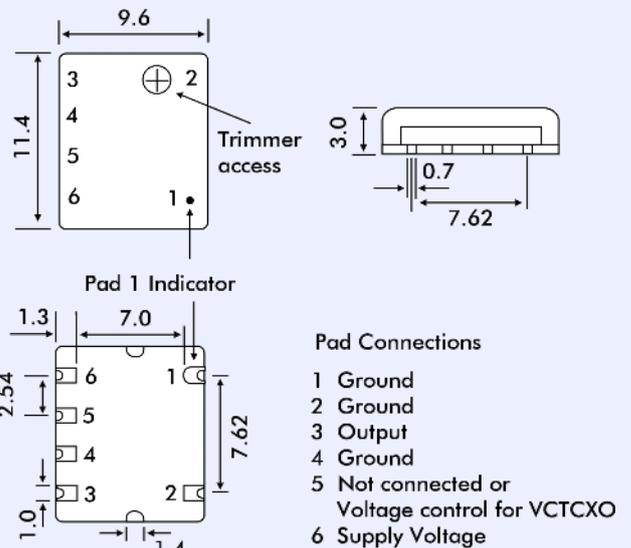

DESCRIPTION

M63S series TCXOs are packaged in the industry-standard 11.4 x 9.6 x 3.0mm SMD package. With clipped sinewave output, close tolerances are available from $\pm 0.5\text{ppm}$ over 0° to 50°C or $\pm 1\text{ppm}$ over -40° to $+85^\circ\text{C}$. The part has low power consumption.

SPECIFICATION

Product Series Code	TCXO: M63S VCTCXO: VM63S
Frequency Range:	10.0MHz to 27.0MHz
Output Waveform:	Clipped Sinewave
Initial Calibration Tolerance:	$< \pm 1\text{ppm}$ at 25°C
Standard Frequencies:	10.0, 12.80, 13.0, 14.40, 15.36, 16.384, 19.2, 19.440, and 19.68MHz (Partial list)
Operating Temperature Range:	See table
Frequency Stability	
vs. Ageing:	$\pm 1.0\text{ppm}$ max. first year
vs. Voltage Change:	$\pm 0.3\text{ppm}$ max. $\pm 5\%$ change
vs. Load Change:	$\pm 0.3\text{ppm}$ max. $\pm 10\%$ change
vs. Reflow:	$\pm 1\text{ppm}$ max. for one reflow (Measured after 24 hours)
Supply Voltage:	+2.8, +3.0 or +5.0Volts (Specify when ordering)
Output Voltage Level:	0.8V p-p minimum
Start-up Time:	2ms typical, 5ms max.
Current Consumption:	See table below
Output Load:	10k Ω /10pF $\pm 10\%$
Harmonic Distortion:	-10dB typical, -7dB max.
SSB Phase Noise:	See table
Output Format:	DC block, AC coupled
Storage Temperature:	-50° to $+100^\circ\text{C}$
RoHS Status:	RoHS Compliant version available. See part numbering procedure.

VM63S VOLTAGE CONTROL SPECIFICATION

Control Voltage:	Standard = $+1.5 \pm 1.0\text{Volts}$ for all input voltages. (Contact technical sales if $+2.5 \pm 2.0\text{Volts}$ is required.)
Frequency Deviation:	$\pm 6.0\text{ppm}$ min.
Slope Polarity:	Positive (increase of control voltage increases output frequency.)
Input Impedance:	1.0M Ω min.
Modulation Bandwidth:	3.0kHz min. measured at -3dB

FREQUENCY STABILITY

Frequency Stability (ppm)		± 0.5	± 1.0	± 1.5	± 2.0	± 2.5
Temperature Range ($^\circ\text{C}$)	0 ~ +50	ASK	✓	✓	✓	✓
	-10 ~ +60	x	✓	✓	✓	✓
	-20 ~ +70	x	x	✓	✓	✓
	-30 ~ +75	x	x	x	✓	✓
	-40 ~ +85	x	x	x	x	✓

✓ = available, x = not available, ASK = call Technical Sales

CURRENT CONSUMPTION

Supply Voltage		Max Current	
		+3.0V	+5.0V
Frequency Range	10.0 to 13MHz	1.3mA	2.0mA
	13.01 to 20MHz	1.5mA	2.2mA
	20.01 to 27MHz	2.0mA	2.5mA

PHASE NOISE

SSB Phase Noise at 25°C	Offset (Hz)	10	100	1k	10k	100k
	M32S 13MHz (dBc/Hz)		-80	-115	-135	-148

PART NUMBERING PROCEDURE

Example: **M63 S 3 -19.44-2.5/-30+75**

- Series Description: TCXO = M63
- VCTCXO = VM63
- RoHS Status: 'G' = RoHS Compliant
- Output type: 'S' = Clipped sine wave
- Supply Voltage: 28 = 2.8 VDC, 3 = 3.0 VDC, 5 = 5.0 VDC
- Frequency (MHz): 19.44
- Stability over OTR ($\pm\text{ppm}$): 2.5
- Operating Temperature Range (OTR) ($^\circ\text{C}$): -30 to +75 (Lower and upper limits.)